


POLO COMBI

MULTI-USE IP65 SLIM BULKHEAD

Polo Combi is the perfect solution for virtually any application. Every product features multi-wattage and multi-cct selection. Plus every fitting is supplied with a choice of trims. Add emergency and microwave sensor versions and it is the only bulkhead you need to cover virtually every project.

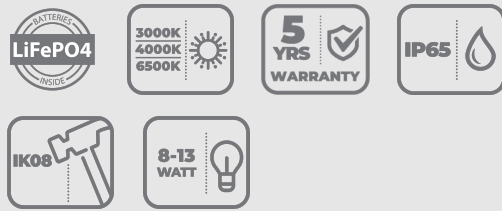

Features

- Configurable in 36 different ways
- Multi - Wattage / 3 CCT / 3 Trim's
- IP65 and UV stable - outdoor or indoor use
- BESA and conduit entries
- Microwave sensor and emergency options

Specification

| Code | Description | Lumen Output | Emergency Lumen Output | Wattage | Efficacy |
|---------------|---|---------------------------------|------------------------|---------------------|----------|
| PCB13E/MS-CCT | Polo Combi 230V 13W IP65 Multi-Use Bulkhead with Selectable Wattage and CCT, Multiple Trims, Microwave sensor and 3h Maintained Emergency | 875lm 963lm 1284lm 1395lm | 145 lm | 8W 9W 12W 13W | 107 lm/W |

Product Information

| | |
|----------------------------|-----------------------|
| Warranty | 5 Years |
| Emergency Battery Warranty | 5 Years |
| Colour Appearance (CCT) | 3000K 4000K 6500K |
| IP Rating | IP65 |
| IK Rating | IK08 |
| Emergency Battery Type | LiFePO4 |
| Voltage | 220-240V |
| Material (Body/Housing) | Polycarbonate |
| Material (Diffuser/Cover) | Polycarbonate |
| Colour Rendition (CRI) | Ra >80 |

| | |
|------------------------|-----------------------------------|
| Colour Finish | White RAL9003 Black RAL9005 |
| LED Life Expectancy | L70B50 54,000 Hours |
| Power Factor | 0.7/0.8 |
| Frequency | 50/60Hz |
| Driver Type | Fixed Output - Selectable Wattage |
| Approval | UKCA CE |
| Electrical Class | Class II |
| Working Temperature | 5°C to 40°C |
| EM Working Temperature | 5°C to 40°C |

POLO COMBI

MULTI-USE IP65 SLIM BULKHEAD

Packaging Information

| | |
|-------------------------|-----------------------------|
| Dimensions (mm) | Ø: 291 x D: 83 mm |
| Product Net Weight (kg) | 1.01 kg |
| Barcode | 5055807625234 |
| Box Dimensions (mm) | L: 296 x W: 296 x D: 128 mm |
| Box Gross Weight (kg) | 1.17 kg |

| | |
|--------------------------------|-----------------------------|
| Units/Outer Carton | 10 |
| Outer Carton Barcode | 15055807625231 |
| Outer Carton Dimensions (mm) | L: 662 x W: 310 x D: 605 mm |
| Outer Carton Gross Weight (kg) | 13.8 kg |

