


RHOMBUS PLUS

HIGH EFFICACY TP(B) BACK-LIT PANEL

Rhombus Plus back-lit panels offer a cost effective combination of high efficacy and TP(b) diffusers. Available in a choice of size formats and 4000K or 6000K.

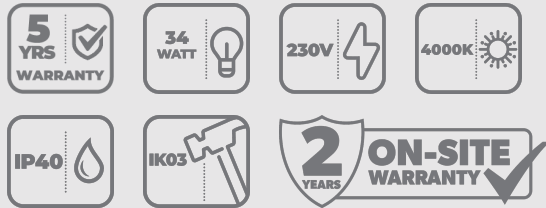

Features

- High efficacy upto 150 lm/W
- TP(b) diffuser as standard
- 595 x595mm & 595 x 1195mm format
- Emergency options available

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
RBX6634-40	Rhombus Plus 595mm x 595mm TP(b)	3570 lm		34W	105 lm/W

Product Information

Warranty	5 Years
On-Site Warranty	2 Years
Colour Appearance (CCT)	4000K
IP Rating	IP40
IK Rating	IK03
Voltage	230V
Material (Body/Housing)	Steel & Aluminium
Material (Diffuser/Cover)	TP(b) Rated Styrene
Colour Rendition (CRI)	Ra > 80

Colour Finish	White RAL9003
LED Life Expectancy	L80B50 50,000 Hours
Power Factor	>0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class II
Working Temperature	-20°C to 45°C

RHOMBUS PLUS

HIGH EFFICACY TP(B) BACK-LIT PANEL

Packaging Information

Dimensions (mm)	L: 595 x W: 595 x D: 25 mm
Product Net Weight (kg)	1.65 kg
Barcode	5055807622974
Box Dimensions (mm)	L: 650 x W: 615 x D: 35 mm
Box Gross Weight (kg)	2 kg

Units/Outer Carton	5
Outer Carton Barcode	15055807622971
Outer Carton Dimensions (mm)	L: 665 x W: 630 x D: 190 mm
Outer Carton Gross Weight (kg)	10.7 kg

